

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
13 December 2001 (13.12.2001)

PCT

(10) International Publication Number
WO 01/94006 A2

(51) International Patent Classification⁷: **B01J 19/24**

Eichwald 9, D-79787 Lauchringen (DE). **PAIKERT, Bettina**; Badererstrasse 8, CH-5452 Oberrohrdorf (CH).

(21) International Application Number: **PCT/US01/17889**

(22) International Filing Date: **1 June 2001 (01.06.2001)**

(74) Agents: **SQUIRE, William** et al.; Carella, Byrne, Bain, Gilfillan, Cecchi, Stewart & Olstein, 6 Becker Farm Road, Roseland, NJ 07068 (US).

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:
09/589,817 **7 June 2000 (07.06.2000)** **US**

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.


(71) Applicant: **ABB LUMMUS GLOBAL, INC.** [US/US];
1515 Broad Street, Bloomfield, NJ 07003 (US).

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,

(72) Inventors: **GRIFFIN, Timothy, Albert**; Bachtalstrasse 15, CH-5408 Ennetbaden (CH). **WINKLER, Dieter**; Am

[Continued on next page]

(54) Title: **HEAT EXCHANGER/REACTOR APPARATUS**

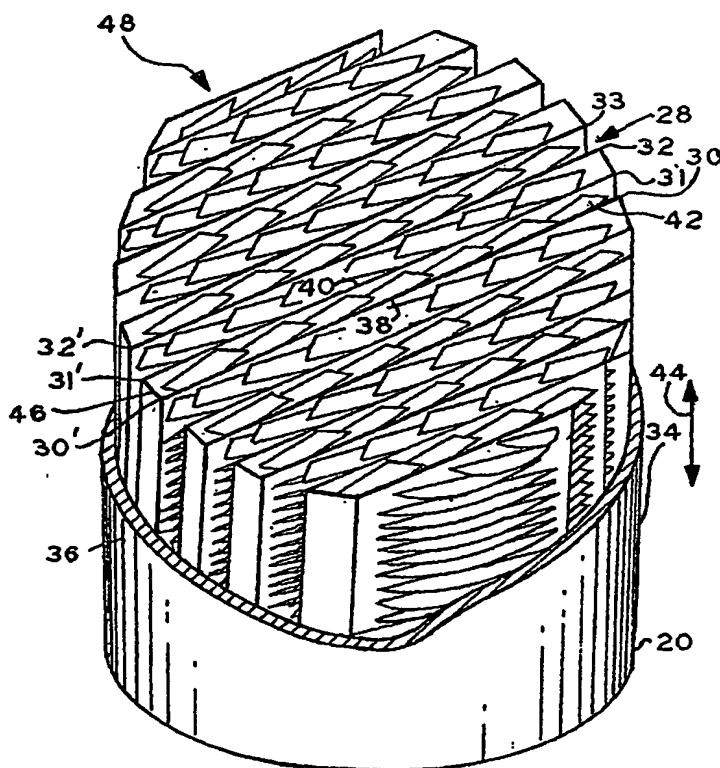

(57) Abstract: A plurality of reaction tubes are in a reaction vessel cavity in which a cooling fluid passes through. A plurality of modular packings are provided in each tube, the packings comprising porous mesh sheet material made of sintered metal fibers having a diameter of about 1-30 microns coated with a catalyst, the material having a void volume of preferably about 80-95%. Each module is formed of a single sheet of material that is folded over at fold lines to form an intermediate interface that thermally conductively engages the tube and a pair of spaced parallel sections, the sections and interfaces forming a zig-zag structure to simplify manufacturing and insertion into the tubes. The sections are planar sheets with turbulence generators in the form of vanes formed from the sheet material and extending into the channels of adjacent sections. End vanes have arcuate edges for directly engaging the tube as do the end edges of the sections and the interfaces to provide enhanced thermal conductive engagement with the tube. The mesh material has a catalyst in the voids thereof. The vanes direct the fluid in the tubes against the sides of the tube bore and also create turbulence for promoting fluid flow through the mesh material.

WO 01/94006 A2



IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *without international search report and to be republished upon receipt of that report*

HEAT EXCHANGER/REACTOR APPARATUS

This invention relates to catalyst support structures for external heat and
10 mass transport limited chemical processes and heat and mass transport apparatus.

CROSS REFERENCE TO RELATED APPLICATIONS AND PATENTS

Of interest are commonly owned copending U.S. applications Application
Serial No. 09/181,186 entitled "Method and Apparatus for Making Catalyst Carrier
Device Element" filed October 28, 1998 in the name of Vogt et al., Application
15 Serial No. 09/002539 entitled "Catalyst Carrier Device and Element Therefor" filed
January 2, 1998 in the name of Paikert et al. corresponding to PCT/US98/27699
filed December 29, 1998, Application Serial No. 09/156,023 entitled "Coated
Products" filed in the name of Schuh et al. on September 17, 1998, Application
Serial No. 09/156,023 entitled "Coated Products" filed September 17, 1998 in the
20 name of Schuh et al., Application serial no. 09/ 002,539 filed January 2, 1998
entitled "Structured Packing and Element therefor" in the name of Paikert et al.
corresponding to PCT application PCT/US98/27699, application Serial No.
09/181,186 entitled Method and Apparatus for making Structured Packing Element
filed October 28, 1998 in the name of Franz Buchi et al. corresponding to PCT/US

99/24907 and Application Serial No. 60/087,474 entitled "Structured Packing and Element Therefor" filed May 29 1998 in the name of Overbeek et al. corresponding to PCT/US99/10784.

Also of interest are U.S. Pats. Nos. 5,304,330, 5,080,962; 5,102,745 and
5 5,096,663 which disclose making mesh material. All of the foregoing applications and patents are incorporated in their entirety by reference herein.

Catalyst support structures are known for use in heat/mass transfer limited chemical processes in tubular reactors. Catalyst geometries for such processes that are currently performed in small diameter, i.e., less than 8", multi-tubular chemical
10 reactors are chosen to enhance external heat transfer. One type of catalyst support structure is known as Raschig rings. Heat transport is important in highly exothermic reactions and also highly endothermic reactions such as syngas production. The geometry of the catalyst is also important where mass transport is a limiting factor, such as in exhaust gas cleanup.

15 Catalytic tubular fixed bed reactors are widely used for the production of basic chemicals and intermediates, e.g., the partial oxidation of ethylene to ethylene oxide (single phase, gaseous highly exothermic reaction). The optimum reaction temperature in this case is about 250° C at pressures around 20 bar. Typical industrial reactors are of shell and tube type as shown in Fig. 1. In partial oxidation
20 reactions, the reaction conditions (especially temperature) are critical. If the temperature is too low, the chemical reaction rate is too small and the process becomes more expensive to operate; if it is too high, the sequential reaction of ethylene oxide to carbon oxides is increased at the expense of valuable product.

In an ethylene oxide reactor the catalyst is arranged in tubes and the heat exchange fluid (typically water or oil) circulates externally around the tubes. It is also possible to use a vaporizing fluid as the cooling media. The reactor contains 6,000 to 12,000 tubes of 18 to 38 mm in diameter and up to 10 meters in height.

- 5 The catalyst is packed in the tubes in the form of ceramic spheres or rings with a diameter of 3 to 10 mm. The reactors are typically run in a recycle mode, since the per pass conversion is low (<50%).

In heterogeneous catalytic reactions heat and mass transfer occurs simultaneously together with the chemical reaction on the catalyst surface. The

- 10 process can be subdivided into the following steps:

1) mass transport of reactants to the surface by convective and/or diffusion processes.

2) chemisorption of reactants on active centers of the catalyst.

3) chemical reaction

- 15 4) desorption of the products

5) mass transport of the products away from the surface.

Some reactions are either strongly exothermic or endothermic; thus, they are very sensitive to the reaction temperature. Therefore, temperature control and heat transfer are major performance issues and the improvement of existing processes

- 20 depends on their enhancement.

The requirements for the catalyst support can therefore be summarized as:

- efficient heat transfer between catalytic surface and bulk flow and between this bulk flow and the tube wall (heat exchange surfaces).
- efficient mass transfer (for mass transport limited reactions)

- low pressure loss (especially if the conversion/pass is low)
- sufficiently high catalyst concentration and high catalyst utilization – volumetric activity

In addition, the catalyst support structure or packing has to be installed into
5 the tubes and removed from the tubes easily.

Ceramic pellets or spheres are used as catalyst supports in present applications. In a nonadiabatic reaction, the generated heat must be transported perpendicular to the main flow direction in the tubes through the fixed catalyst bed to the tube walls. In a dumped packing of pellets, the radial heat transport is
10 established as a result of the random arrangement and the resulting tortuous flow around the pellets. Hollow and full cylinders are in this case more effective than spheres due to their greater non-uniformity. The heat transport at the boundary between the fixed bed and the tube wall is also decisive. The flow within the tube is not uniform with higher velocity along the tube wall than in the center due to
15 differences in free volume (flow resistance). Thus, the flow will bypass the center of the packing and heat transfer from the tube center to the wall is reduced. This velocity profile is established within the first 10-20 equivalent packing diameters, creating a barrier for effective convective radial heat transfer.

The present inventors recognize a need for an improved tubular reactor to
20 create a more uniform radial temperature profile within the heat exchanger tubes to provide more uniform reaction conditions leading to higher reaction selectivity and which will overcome the problems noted above with the prior art heat exchanger catalyst support or packing structures. More particularly, the present inventors recognize that catalyst coated micro fiber metal sheets will provide both an

improvement in volumetric catalyst activity, particularly due to a decrease in mass transfer resistances, and also the desired more uniform radial temperature profile within the heat exchanger tubes. The problem with such micro fiber sheets is the need to place such material in small diameter tubes, i, e., provide ease of

5 manufacturability, while at the same time provide enhanced heat or mass transfer. Therefore, such sheets need to be appropriately configured to be easily placed in small diameter tubes.

A heat/mass transfer apparatus according to the present invention comprises a thermally conductive tube having a longitudinal axis for receiving a first fluid

10 internally thereof thermally conductively contacting the tube internal surface and having an external surface for transfer of heat energy from the internal surface to a second cooling fluid thermally conductively contacting the tube external surface.

A packing is included and comprises at least one catalyst coated porous thermally conductive sheet material in the tube, the sheet material having pores

15 exhibiting a plurality of interstices in fluid communication with each other and externally the material, the sheet material for providing a reaction with the first fluid and for the transfer of reaction heat energy in the first fluid to the tube, the sheet material lying in a plane extending along the tube axis and including vanes

extending therefrom arranged for directing the first fluid laterally across the tube

20 axis against the tube for optimizing energy transfer from the first fluid to the tube and for thermally conductively transferring energy from the sheet material to the tube.

In one aspect, the sheet material comprises a plurality of sections, adjacent sections forming a fluid passage chamber therebetween and extending in the axial

direction of the tube axis. The vanes form turbulence generators and extend into the corresponding chamber from the sections and are arranged for directing fluid flow laterally along the corresponding section relative to the tube axis toward the tube.

The catalyst is secured to the material for reacting with the fluid as the
5 - received first fluid impinges on the packing and passes through the interstices.

The porous material preferably comprises sintered metal fibers.

In a further aspect, the porous material comprises planar sheet material.

In a further aspect, the packing is modular, a plurality of said modular packings being located in the tube in series along the tube axis.

10 In a still further aspect, the packing is a module comprising a plurality of sheet material sections, adjacent sections defining a fluid channel therebetween.

In a further aspect, the packing is a single sheet of material with a plurality of sections, each section being connected by fold lines to an adjacent section.

In a further aspect, the adjacent sections are interconnected by an
15 intermediate interface.

Preferably each section has opposing edges in thermal conductive contact with the tube.

In a further aspect, the sections are spaced to form a channel therebetween, adjacent sections being connected by an interface in thermal conductive contact with
20 the tube.

The turbulence generators preferably comprise an array of vanes extending from each section, the array being aligned along the tube axis.

In a further aspect, the vanes have a width dimension and a length dimension that are inclined relative to the tube axis, the length direction being inclined laterally the tube axis to direct the first fluid against the tube.

IN THE DRAWING:

5 FIGURE 1 is a front elevation schematic sectional view of a heat/mass transfer apparatus according to an embodiment of the present invention;

FIGURE 2 is an isometric view of a packing module used in the tubes of the apparatus of FIGURE 1;

FIGURE 3 is a further isometric view of the packing module of Fig. 2;

10 FIGURE 4 is a top plan sectional view of the a tube of the embodiment of Fig. 1 showing a packing module in a tube;

FIGURE 5 is a plan view of a set of blanks used to make the modules of Figs. 2 and 3;

15 FIGURE 6 is a more detailed view of a portion of one of the blanks of Fig. 5 illustrating the vane formation;

FIGURE 7 is an isometric schematic view of a tube with a further embodiment of a catalyst support structure therein; and

FIGURES 7a, 7b and 7c are sectional plan views through the embodiment of Fig. 7 taken at different axial locations of the tube.

20 In Fig. 1, a reaction vessel 2 comprises a metal, e.g., stainless steel, shell 4 having a cavity 6. The shell 4 is a circular cylinder with semi-spherical end plates 8 and 10 at the respective top and bottom of the cavity 6. A gas inlet pipe 10 is at the bottom end plate for supplying a gas to be processed into inlet manifold 16. A gas outlet pipe 14 receives processed gas from exhaust manifold 18.

An array of linear tubes 20, which may be metal or other good heat conductive material, and which may be of any desired internal diameter as discussed in the introductory portion, are connected in parallel in fluid communication with the inlet and exhaust manifolds 16 and 18. Thus fluid flowing into inlet manifold 16
5 from the pipe 12 flows through the tubes 20 into the exhaust manifold 18 into the outlet pipe 14. The structure thus far described is available in the prior art.

The cavity 6 has a cooling fluid inlet 22 and a cooling fluid outlet 24. Cooling fluid such as water or other liquid or gas flows into the cavity in convective contact with all of the tubes 20. Vaporizing liquid can also be used for cooling, just
10 as condensing fluid can be used if heating is necessary. The cooling fluid transfers heat from the tubes 20 generated by the reaction in tubes 20. The cooling fluid, e.g., water, cools the reaction fluid, e.g., gas., flowing in the tubes 20 from the gas inlet pipe 12 to the outlet pipe 14. As mentioned in the introductory portion, prior art reactors/heat exchangers employ ceramic rings or other structures in the tubes as
15 catalyst support structures. As described these structures are not as efficient as desired for controlling the temperature of the fluid flowing in the tubes 20 in the desired temperature range and, therefore, the reactions in the tubes are not as efficient as desired. The catalysts may not provide as complete a reaction as desired or excessive amounts of other unwanted products may be made.

20 The term mass transfer in this art refers to the motion of the fluid and its contact with the catalyst. As mentioned in the introductory portion, the mass transfer refers to the transport of reactants to the surface of the catalyst by convection or diffusion, chemisorption of the reactants to the centers of the catalyst in order to insure complete reaction with the catalyst, the chemical reaction itself,

the desorption of the products and the mass transport of the products away from the surface. The prior art support structures and catalysts thereon do not provide efficient processing in respect of these various parameters involved with the chemical reaction process as described in the introductory portion. The present
5 invention provides modules of catalyst support structure packing inside the tubes which are significantly more efficient in transferring heat / unit of pressure loss.

In Figs. 2, 3 and 4, a catalyst support structure or heat transfer modular packing 28, according to a given implementation, is placed axially in each tube for the length of each tube 20. The packings 28 each comprise a single one piece sheet
10 of porous mesh or screen material made of metal or other fibers. The fiber material may also be ceramic, glass, carbon or any combination thereof. The modular packings 28 are placed in preferably abutting (or closely spaced relation) in the tube 20 bore.

Representative modular packing 28 comprises a single sheet of the porous
15 mesh material. The mesh material, Fig. 4, is folded at fold lines 30, 31, 33 and so on at one side 34 of the packing 28, and at fold lines 30', 31' and 33' and so on at the opposite side of the 36 tube 20. Fold lines 30, 30' define a planar section 38 therebetween of the flat planar sheet mesh material. Fold lines 31, 31' form an adjacent planar section 40 of mesh material. Sections 38 and 40 form a fluid flow
20 channel 42 therebetween for fluid flowing nominally in direction 44 therein from the inlet manifold 16 to the outlet manifold 18, Fig. 1. The actual direction of fluid flow in the tubes is complex due to turbulence as will be described and also flows inclined transverse to the tube longitudinal axis defined by direction 44.

The region between sections 38 and 40, by way of example, between fold lines 30' and 31' forms a generally rectangular intermediate tube interface 46 which abuts the tube 20 inner surface. The sections 38 and 48 which are representative of the orientation of the other sections in the packing 28 are parallel and parallel to the other sections in the packing. As a result there is an array 48 of parallel sections, each section terminating at a foldline forming an interface with the fold line of the adjacent section. The intermediate interfaces such as interface 46 all abut an inner surface of the tube 20 in preferable thermal conductive relation. The sections such as sections 38 and 40 and so on are all interconnected as a one piece structure separated by fold lines and an intermediate interface, such as interface 46.

The array of sections such as sections 38 and 40 form a corresponding array of fluid channels such as channel 42 which are all parallel of generally the same transverse width in directions 50, Fig. 4. Located in each channel are turbulence generator vanes 52, 54 and 56, for example in channel 58. The vanes are all inclined at about 45° with respect to the fluid flow direction 44 through the tube 20, but may be inclined at other angles. The vanes redirect fluid impinging on the vanes transversely against the tube 20 inner side wall surface to optimize heat transfer to the tube. The vanes 52, 54 and 56 are just a few of the vanes attached to section. Other like vanes are in spaced alignment with the vanes 53, 54 and 56 in the axial fluid flow direction 44 of the tube 20 in a vertical array. Either an interface or vane (at the edge of the packing such as vanes 57 and 59, Fig. 4) is in thermal conductive contact with the inner surface of tube 20. The modular packing 28 is thus a zig-zag structure folded in accordion fashion with somewhat rectangular channels formed by planar sections and intermediate interfaces. The intermediate interfaces are at angles

to the plane of some of the sections so as to mate with corresponding curvature of the tube 20 inner surface as shown in Fig. 4.

The configuration and layout of the vanes 52, 54, 56 and so on is best illustrated in connection with figures 5 and 6. In Figs. 5 and 6, the orientation of the
5 vanes are different, but the dimensioning of the vanes is the same for a given tube internal diameter as the relative orientation of the vanes is not critical for a given tube, the orientation of all of the modules preferably being the same in each corresponding tube. However, the orientation of the vanes, which may be about 45° to the longitudinal axis of the tube may also be different for a given set of modules
10 in a tube according to a given implementation.

In Fig. 5, three identical rectangular blank sheets 62, 62' are formed of wire mesh from a blank 63, the mesh material to be described below. Representative sheet 62' is an elongated rectangular sheet of fiber mesh material having two parallel identical longitudinal edges 64 and parallel identical end edges 66. Solid lines in the
15 blank 63 sheet represent through cuts. The blank sheet 62' has a plurality of aligned sections 68, 70 and 72 and so on in a linear array. The sections have different lengths L that corresponds to the transverse dimension across the tube 20 internal diameter for that section (see Fig. 4). The interfaces are between each such section such as interfaces 74, 76 and 78. The interfaces alternate on opposite sides of the
20 tube 20 as shown in Fig. 4. The vanes are formed by cuts 88, Fig. 6, in section 104 at 45° to the length dimension of the blank and sections from left to right in the figure.

As best seen in Fig. 6, in blank 104 the vanes such as vanes 80, 82 and 84 in representative section 86 are identical and formed by through cuts 88. Vanes 90 and

92 are shorter than vanes 80, 82 and 84 as they are located in the corner of the section. The mirror image vanes 94 and 96 in the diagonal opposite corner of section 86 are the same as vanes 90 and 92, but in the alternative may differ from each other according to a given implementation.

5 Cut 88 has a straight portion 88' and an angled cut 88" at one end of the cut and a U-shaped cut 98 in conjunction with cut 88'. Representative vane 84 has a fold line 100 shown by the dashed line. The fold lines for the vanes in the other sections are not shown by dashed lines, but are intended to be included. The fold lines for all of the central sections in blank 104 excluding the two opposite end
10 sections such as section 102 are parallel to fold line 100.

 The sections are each separated by two fold lines such as fold lines 106 and 108 between sections 86 and 102. Sections 106 and 108 form intermediate interface 110 therebetween. A further intermediate interface 112 is between fold lines 114 and 116 of respective sections 118 and 86 and so on.

15 The vanes of end section 102 are different then the vanes intermediate the end sections. The vanes 120, 122, 124, 126 and so on of the end section 102 are thinner in transverse width, and have curved external edges 128. These vanes directly abut the inner surface of the tube and therefore have curvatures that match the curvature of the curved inner surface of the tube 20. These end section vanes
20 correspond in location to vanes 54, 57, for example, in Fig. 4, modular packing 28. It should be understood that the drawings are not to scale and are generally schematic in nature to explain the principles rather than provide exact dimensional relation of the different elements of the packing and tube 20.

Because the vanes of the different modular packings 28, Figs. 2-4, are inclined generally at 45° to the longitudinal axis of the tubes 20, these vanes all direct fluid against the inner surface of the tube walls to maximize heat transfer from the interior of the sections to the tubes. The vanes also create local pressure differentials, i.e., turbulence, needed to maximize fluid flow through the mesh of the substrate material forming the modular packing 28 as will be described in more detail below. The mesh material because of the small pore size normally does not exhibit fluid flow therethrough when the pressure differential thereacross on opposite surfaces is about the same or a small value.

10 The mesh material forming the packing 28 used throughout the apparatus 2 in all of the tubes is of the same construction. The mesh or screen which is a micromesh is used as the porous packing. The mesh material is a three-dimensional network of fibers or wires, with such fibers or wires generally having a diameter of at least 1 micron and a diameter which generally does not exceed 25 microns, 15 although smaller or larger diameters may be employed. The network may be of the type described in U.S. Patent Nos. 5,304,330; 5,080,962; 5,102,745; or 5,096,663. The three-dimensional network of materials may be one which is comprised of fibers, and may be a felt or the like, a fiber filter or paper and the like suitable for high temperature processes employed in reaction systems of the type described, or 20 may be a porous composite. The compacted wires or fibers define a three-dimensional network of material which has a thickness thereto. In general, the thickness of the three-dimensional network of material is at least 5 microns, and generally does not exceed 10 mm. In general, the thickness of the network is at least 50 microns and does not exceed 2 mm.

The three-dimensional network may be coated or uncoated with a catalyst and such three-dimensional network may have particles entrapped or contained therein. The network may have different pore sizes over the thickness thereof and may be laminated and/or comprised of the same materials and/or may have multi-
5 layers.

It is to be understood that the mesh may be comprised of one type of fiber or may be comprised of two or more different fibers or the mesh fibers may have a single diameter or may have different diameters. The mesh is preferably formed of a metal, however, other materials may be employed such as a ceramic. As
10 representative examples of such metals, Nickel, various stainless Steels; e.g., 304, 310, and 316, Hastelloy, Fe-Cr alloys, and so on may be used. The mesh can retain particles or fibers in the interstices thereof and the particles or fibers contain a catalytic function.

The modular packing preferably includes a catalyst for reaction processes in
15 this embodiment. The catalyst, if used, may be coated on the fibers forming the packing and/or supported or unsupported catalyst may be entrained in the mesh openings.

Although it is preferred to fabricate the packing 28 from porous materials such as a micromesh structure, Applicants note that in order to efficiently use such
20 porous materials as packings, it is necessary to provide turbulence generators which are spaced over the packing structure in order to provide for efficient flow of liquid through pores in the packing. That is, as mentioned above, the flow of fluid, gas or liquid does not normally occur through the material unless a pressure differential is created thereacross of sufficient magnitude so as to promote fluid flow therethrough.

In a preferred embodiment, in addition to the turbulence generators, the packing can be provided with additional openings. These openings are provided by the relatively large regions produced by the vanes as they are folded out of the plane of the sections of the modular packing 28.

5 The invention has been described with respect to a representative embodiment of modular packing structure formed from a mesh material; however, such structures are by way of illustration in that the present invention is applicable to other structures and designs. It is recognized herein that highly porous mesh material, when used as packing, even though such material has a high-void volume;
10 for example, greater than 70% and in many cases greater than 90%, e.g., 95%, fluid does not effectively flow through the pores of the packing and that fluid flow through such pores can be improved by providing turbulence generators. Thus, the vanes form both turbulence generators and fluid flow directivity to the tube walls.

 The vanes direct fluid flow laterally across the tube internal diameter
15 transverse the longitudinal tube axis. The widths of the vanes are inclined in the axial direction of the tube axis and the length dimension of the vanes is inclined in the transverse lateral direction to direct and channel fluid flow to the tube inner side wall surfaces. The vanes create turbulence in the fluid attempting to flow vertically in the chambers along the tube axis. The fluid also flows transversely the tube axis
20 to and between the chambers through the openings in the section walls as the fluid is directed transversely toward the tube side walls.

 The size and spacing of the openings in the mesh material of the sections, preferably in combination with the vane turbulence generators, are selected to obtain a desired bulk mixing and pressure drop through the mesh of the structured packing.

The mesh-like structure may be comprised of a single layer, or may include multiple layers where there may be one layer of wires; e.g., a knitted wire structure or a woven wire structure, and preferably comprises a plurality of wires or fibers to form a three dimensional network of materials. In one embodiment, the support
5 structure comprises a plurality of layers or sheets of fibers that are oriented randomly in the layers. One or more metals may be used in producing a metal mesh. Alternatively the mesh fibers may be formed from or include materials other than metals alone or in combination with metals; e.g. carbon or metal oxides or a ceramic.

In general, the thickness or diameter of the fibers which form the plurality of
10 layers of fibers is preferably less than about 500 microns, more preferably less than about 150 microns and more preferably less than about 30 microns. In a preferred embodiment, the thickness or diameter of the fibers is from about 1 to about 30 microns and preferably 8-25 microns.

The three dimensional mesh-like structure may be produced as described in
15 U.S. Pat. Nos. 5,304,330, 5,080,962; 5,102,745 or 5,096,663 incorporated by reference herein. It is to be understood, however, that such mesh-like structure may be formed by procedures other than as described in the aforementioned patents.

The term "void volume" as used herein is determined by dividing the volume of the structure which is open by the total volume of the structure (openings and
20 mesh material) and multiplying by 100. The particular description of the mesh-like sheet material is also described in the aforementioned Application Serial No. 60/116,649 filed January 21, 1999 and incorporated in its entirety by reference herein.

The sheet of mesh material is coated with a catalyst. The supported catalyst which is supported on the mesh-like structure may be present on the mesh-like support as a coating on the wires or fibers that form the mesh-like structure and/or may be present and retained in the interstices of the mesh-like structure.

- 5 In one embodiment, wherein the catalyst supported on a particulate support the catalyst is present as a coating on the mesh-like structure, the mesh-like structure may be initially coated with a particulate support, followed by addition of the catalyst to the particulate support present as a coating on the mesh-like structure. The particle support for the catalyst may include alumina, silica, zirconia, ceria,
- 10 titania, barium oxide and mixtures thereof. Examples of specific compositions are disclosed in the aforementioned Pat. Nos. 4,9065,243; 4,939,113, and PCT Application No. WO 95/35152. Alternatively, the catalyst supported on a particulate support may be coated onto the mesh. The particulate support with or without catalyst may be coated on the mesh structure by a variety of techniques, e.g., dipping or
- 15 spraying. After coating the particulate support without catalyst onto the mesh, the particulate support is impregnated with a solution containing the catalyst precursors and is treated thermally to obtain the catalyst.

- In one embodiment, wherein the mesh-like structure is comprised of a plurality of layers of metal fibers, the particulate support with or without catalyst may be
- 20 coated onto the mesh-like catalyst support by an electrophoretic coating procedure, as described in U.S. Application Serial Number 09/156,023, filed on September 17, 1998 incorporated by reference herein. In such a procedure, a wire mesh-like structure is employed as one of the electrodes, and the particulate support, such as an alumina support of the requisite particle size, with or without catalyst, (which may

include alumina in the form of a sol to promote the adherence of larger particles to the wire mesh) is suspended in a coating bath. A potential is applied across the electrodes, one of which is the mesh-like structure formed from a plurality of layers of fibers, and the mesh-like structure is electrophoretically coated with the alumina support with or without catalyst. If the alumina support does not include a catalyst, the catalyst then can be added to the catalyst structure by impregnating with or dipping the structure (which contains the alumina coating) into an appropriate solution that contains the catalyst and possibly one or more promoters.

As hereinabove indicated, the supported catalyst may be supported on the mesh material by entrapping or retaining the particulate support in the interstices of the mesh. For example, in producing a mesh-like structure comprised of a plurality of layers of randomly oriented fibers, the particulate support may be included in the mix that is used for producing the mesh-like structure whereby the mesh-like structure is produced with the particulate support retained in the interstices of the mesh. For example, such mesh-like structure may be produced as described in the aforementioned patents, and with an appropriate support being added to the mesh that contains the fibers and a binder, such as cellulose. The catalyst or support, entrapped within the interstices of the metal fibers and the binder is subsequently, heated in a reducing atmosphere such as hydrogen such that the fibers attach to each other by sintering action at the fiber contact points within the porous material. In the alternative, the metal fibers and catalyst or support may be heated by flowing an electric current through the material in a flowing gas atmosphere so as to cause the fibers to attach to each other at fiber contact points within the porous material. In the case the produced mesh structure includes the particulate support retained in the mesh structure, the particulate

support retained in the mesh structure is impregnated with the catalyst precursors and treated thermally to obtain the catalyst.

In one example, the fibers are about 8-12 microns in diameter and are employed in sheets of about 0.5 mm thick with 95% voids. The material has the consistency of paper or felt, is delicate and can be readily permanently deformed and/or damaged. The sheets are 1m x 1m and corrugated as described above. These sheets are cut to size for corrugating the material. The material is then cleaned in a solvent, e.g., acetone, to remove contamination and dried in heated air. Optionally, the material may be heat treated at 400-700°C in air to preoxidize the surface of the metal fibers. The catalyst coating is applied in a slurry process, a catalyst carrier or wherein the catalyst is suspended in water (colloidal suspension, slip) and the metal fiber sheet is immersed into the slurry. Because the slurry must penetrate the entire mesh structure (coat the fibers in the void volume), the wetting behavior must be appropriate. Heat treatment provides good wetting properties because a slight oxidation layer on the fibers provides the desired wetting action. However, depending on the material, wetting can be acceptable without heat treatment in accordance with the manufacturing process of the fiber sheets and the fiber wetting characteristics. After heat treatment, contamination needs to be avoided with careful handling of the sheet material.

The coating is applied in the slurry containing the catalytic powder. The slurry contains the catalytic powder of a composition as described in the catalyst related patents and International Application noted in the introductory portion. Preferably, this slurry is deposited as a thin coating, e.g. 1-10 microns, onto the micro fibers. This deposition can be by an electrophoretic process described more

fully in copending Application Serial No. 09/156,023 noted in the introductory portion and incorporated by reference herein. After the electrophoretic coating is applied, the sheets are dried in hot air and heat treated to provide bonding of the catalyst coating on the fibers. The sheet material is heated to about 200-900°C

5 during this heat treating in accordance with the nature of the coating. For example, when a catalyst is directly deposited on to the fibers, a heat treatment of 500°C may be employed. This provides the desired attachment of the coating onto the fiber surfaces and may not affect the properties of the catalyst.

After final heat treatment, the single sheets are formed.

10 The preferred micro fiber mesh material which can be provided by the sintered fiber sheet material of the catalyst carrier device elements provides relatively high catalyst surface area with optimum access to the catalyst by fluids. Where relatively rapid chemical reactions are employed, utilization of the internal surface area of the porous material is dependent upon the rate of transport of the

15 gases to these surfaces. The mass transport is faster in the case of driven forced flow (convection) than by mere concentration of gradients (diffusion). The intended optimum device, therefore, provides optimum cross flow of the fluids at low pressure differentials there across.

To optimize reaction efficiency, the pressure drop is maintained relatively

20 low as discussed above. This is provided by relatively high void space per unit volume, low friction (good aerodynamic characteristics) and prevention of undesirable stagnant gas pockets.

In Fig. 7, an alternative embodiment of a modular packing is shown and includes a tube 130 with the packing 132 therein. The packing 130 includes a

support rod 134 and mesh elements 136 and 138. Elements 136 are all identical and comprise a flat sheet of mesh material as described above. In Fig. 7a, for example, element 136' comprises a segment of a circular disc having a linear chord edge 138 forming a gap 140 with the tube 130.

5 In Fig. 7b, element 136" edge 138' forms a gap 140' with the tube inner surface and is rotated 90° from the orientation of the element 136'. Similarly in Fig. 7c, element 136''' has an edge 138" forming a gap 140" with the tube inner surface. All of the elements are supported by circular cylindrical rod 134 passing through the element centrally thereof. The element 136''' is rotated 90° from the orientation of
10 element 136" or 180° from that of element 136'. A fourth element not shown is rotated 180° from the orientation of that of the element of Fig. 7b. This staggered relationship is repeated throughout the length of the rod 134. The elements are bonded to the rod in the different 90° angular orientations about the rod as seen in the figures.

15 The ends of the rod 134 are bent to form a J-hook 142. The modular packings 28 and 132 can easily be inserted into the tube 130 bore. The modular packing 28 of Figs. 2-4 is preferred as this is the simplest to manufacture. Other modules are inserted serially to fill the tube. The staggered relationship of the elements of Fig. 7 provides the desired pressure drop and turbulence and also flows
20 the fluid in the tube against the side walls to optimize the heat transfer to the tube.

It can be shown that the modular packings described herein with the described mesh structure provides optimum heat transfer to the tubes to maintain the desired temperature of the fluid flowing in the tubes. Also, this mesh material provides optimum reaction of the fluids with the catalyst on the mesh material.

Still other vane or element structures may be provided a modular packing in accordance with the principles described herein. It will occur to one of ordinary skill that various modifications may be made to the disclosed embodiments which are given by way of illustration and not limitation. It is intended that the appended

5 claims define the invention.

What is claimed is:

1. A heat/mass transfer apparatus comprising:

a thermally conductive tube having a longitudinal axis for receiving a first fluid internally thereof thermally conductively contacting the tube internal surface
5 and having an external surface for transfer of heat energy from the internal surface to a second cooling fluid thermally conductively contacting the tube external surface; and

a packing comprising at least one porous thermally conductive sheet material in the conduit, the sheet material having pores exhibiting a plurality of interstices in
10 fluid communication with each other and externally the material, the sheet material for providing a reaction with the first fluid and for the transfer of reaction heat energy in the first fluid to the tube, the sheet material lying in a plane extending along said tube axis and including vanes extending therefrom arranged for directing the first fluid laterally across the tube axis against the tube for optimizing energy
15 transfer from the first fluid to the tube and for thermally conductively transferring energy from the sheet material to the tube.

2. The apparatus of claim 1 wherein said sheet material comprises a plurality of sections, adjacent sections forming a fluid passage chamber therebetween and
20 extending in the axial direction of the tube axis, the vanes forming turbulence generators and extending into the chamber from the sections and arranged for directing fluid to flow laterally relative to the tube axis toward the tube.

3. The apparatus of claim 1 including a catalyst secured to the material for reacting with said fluid as the received first fluid impinges on said packing and passes through the interstices.
- 5 4. The apparatus of claim 1 wherein the porous material comprises sintered metal fibers.
5. The apparatus of claim 1 wherein the porous material comprises any one or more of the group consisting essentially of metal, ceramic, glass or carbon fibers.
- 10 6. The apparatus of claim 1 wherein the porous material comprises planar sheet material.
7. The apparatus of claim 1 including a catalyst secured to the material within said
- 15 interstices.
8. The apparatus of claim 1 wherein the vanes are parallel to each other and are inclined to the longitudinal axis of the tube.
- 20 9. The apparatus of claim 2 wherein the vanes comprise a planar sheet material element extending at an angle to the plane of the corresponding section for about the width of the corresponding section in a direction transverse the tube axis and inclined to the axis in a lateral direction transverse the longitudinal axis of the tube.

10. The apparatus of claim 1 wherein the packing is modular, a plurality of said modular packings being located in the tube in series along the tube axis.

11. The apparatus of claim 1 wherein the packing is a module comprising a plurality
5 of sheet material sections, adjacent sections defining a fluid channel therebetween.

12. The apparatus of claim 1 wherein the packing is a single sheet of material with a plurality of sections, each section being connected by fold lines to an adjacent section.

10

13. The apparatus of claim 10 wherein the adjacent sections are interconnected by an intermediate interface.

14. The apparatus of claim 12 wherein each section has opposing edges in
15 substantial thermal conductive contact with the tube.

15. The apparatus of claim 12 wherein the sections are spaced to form a channel therebetween, adjacent sections being connected by an intermediate interface in thermal conductive contact with the tube.

20

16. The apparatus of claim 12 wherein the vanes comprise an array of vanes extending from each section, the array being aligned along the tube axis, a plurality of the vanes extending to a region adjacent to the tube opposing inner wall surfaces.

17. The apparatus of claim 16 wherein the vanes are inclined relative to the tube longitudinal axis in a lateral direction transverse the tube axis to direct the first fluid against the tube.
- 5 18. The apparatus of claim 16 wherein the vanes extend transversely across the internal diameter of the tube and are spaced from the next adjacent section.
19. The apparatus of claim 12 wherein the vanes extend transversely across the internal diameter of the tube, the vanes of each section being aligned in the same
10 plane along the tube axis.
20. The apparatus of claim 13 wherein the vanes are rectangular in the channels having an interface and have arcuate edges in channels formed by a section on one channel side and a tube inner surface on an opposing channel side.
- 15
21. The apparatus of claim 12 wherein the vanes are formed from the sheet material forming through openings in the sheet material corresponding to the vane dimensions.
- 20 22. The apparatus of claim 1 wherein the packing is formed into a module, a plurality of modules being arranged in an axial array in the tube.
23. The apparatus of claim 1 wherein the tube internal diameter is no greater than about 6 inches (about 15 cm).

24. The apparatus of claim 1 wherein the tube internal diameter is less than one inch
(about 2.5 cm)

1 / 7

FIG. 1

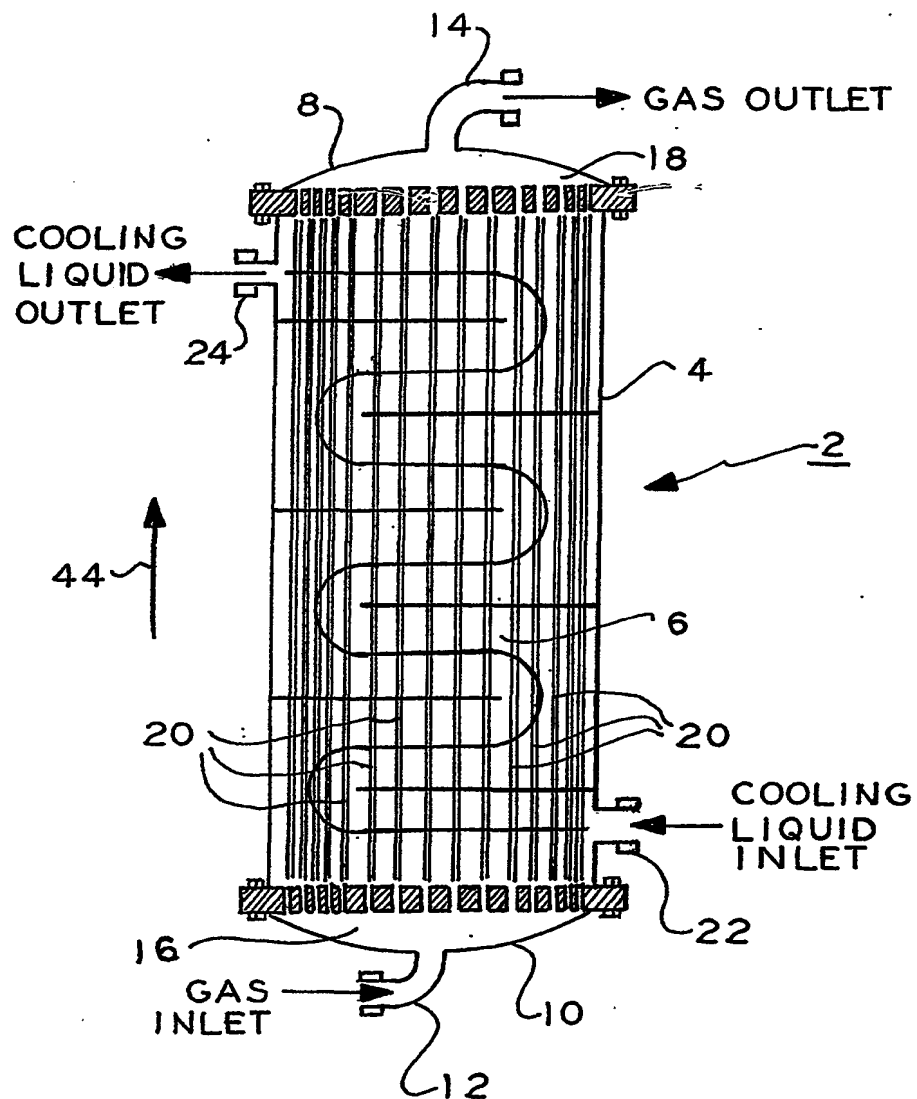


FIG. 2

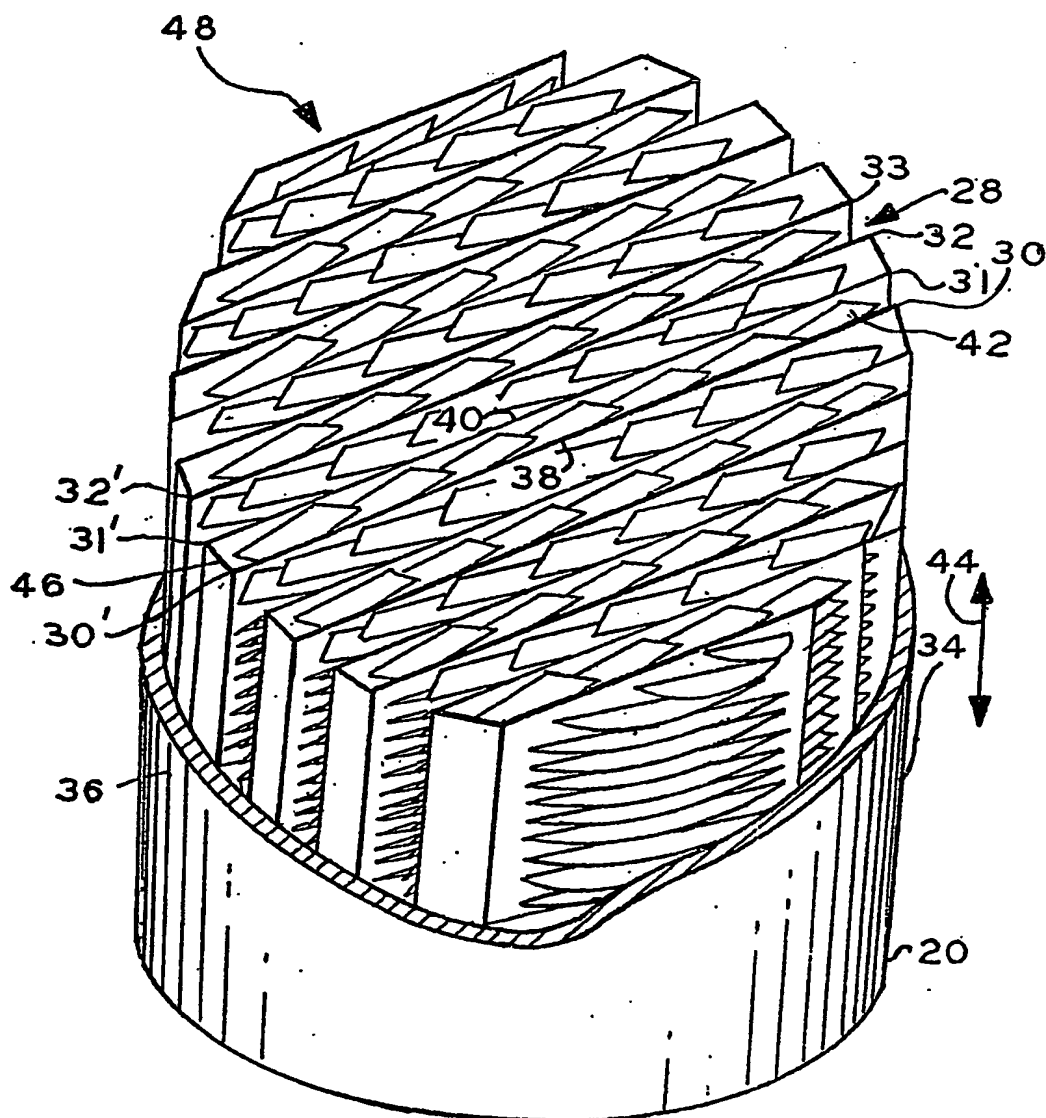


FIG. 3

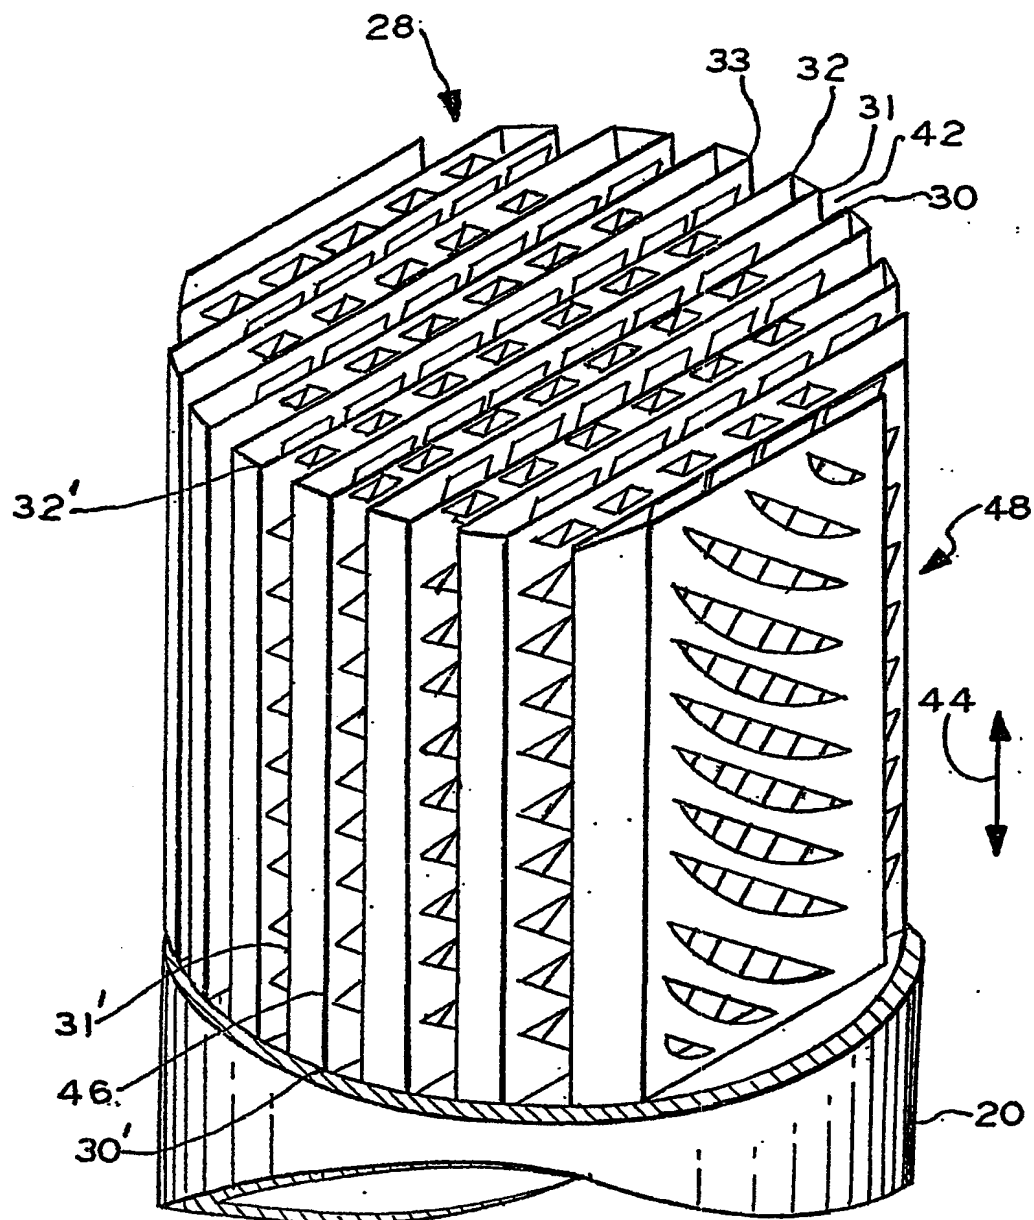


FIG. 4

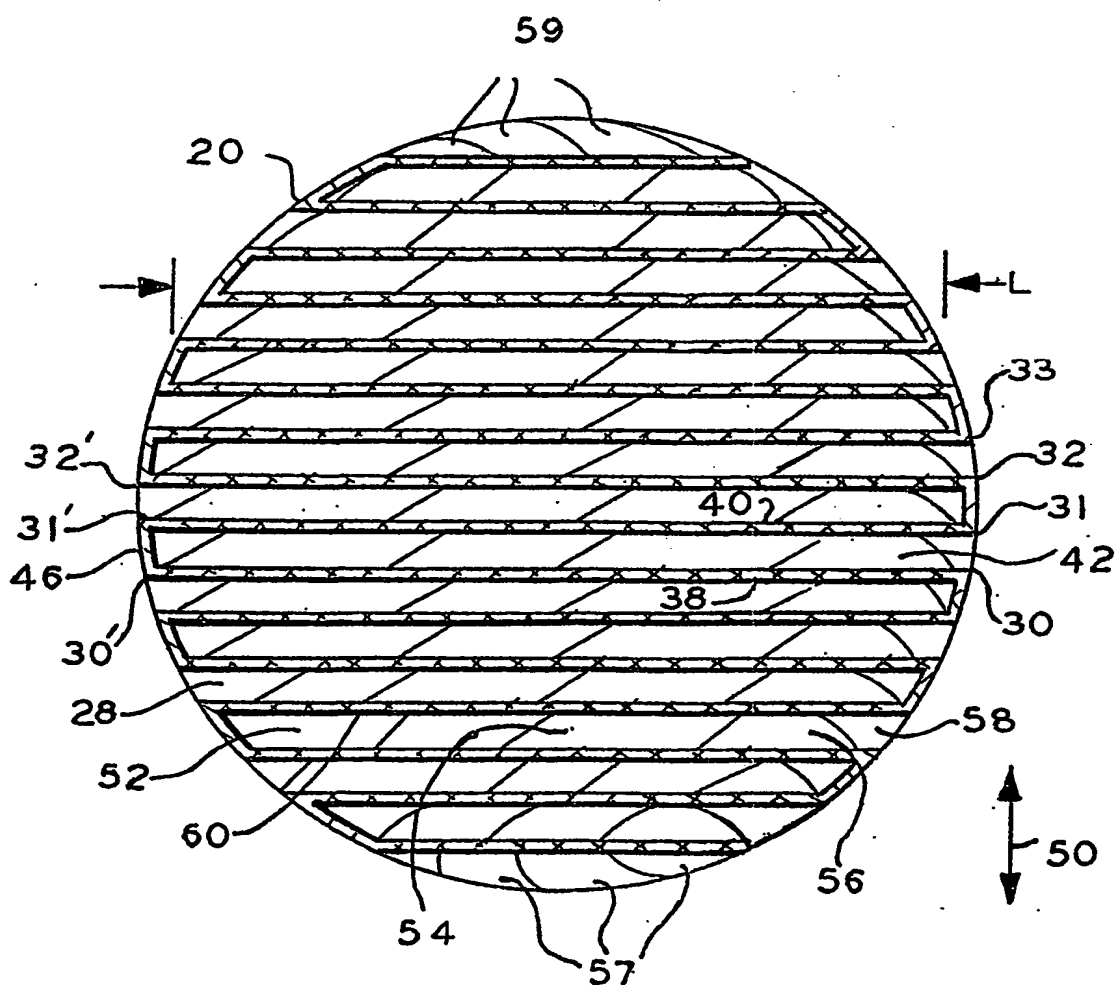


FIG. 7

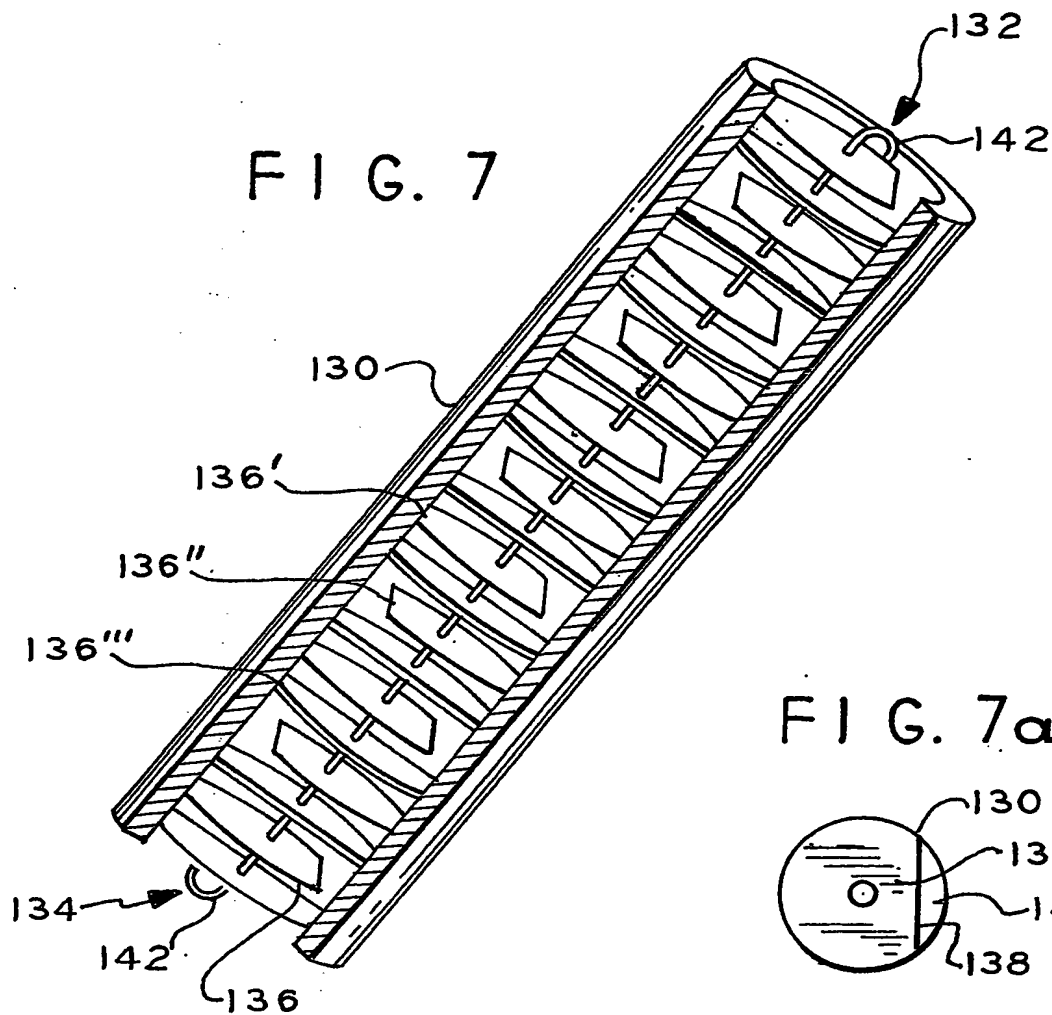


FIG. 7a




FIG. 7c






FIG. 7b

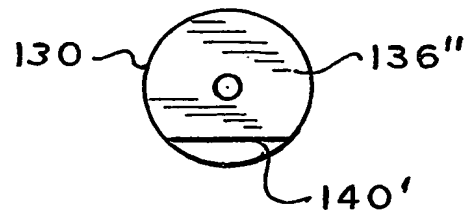

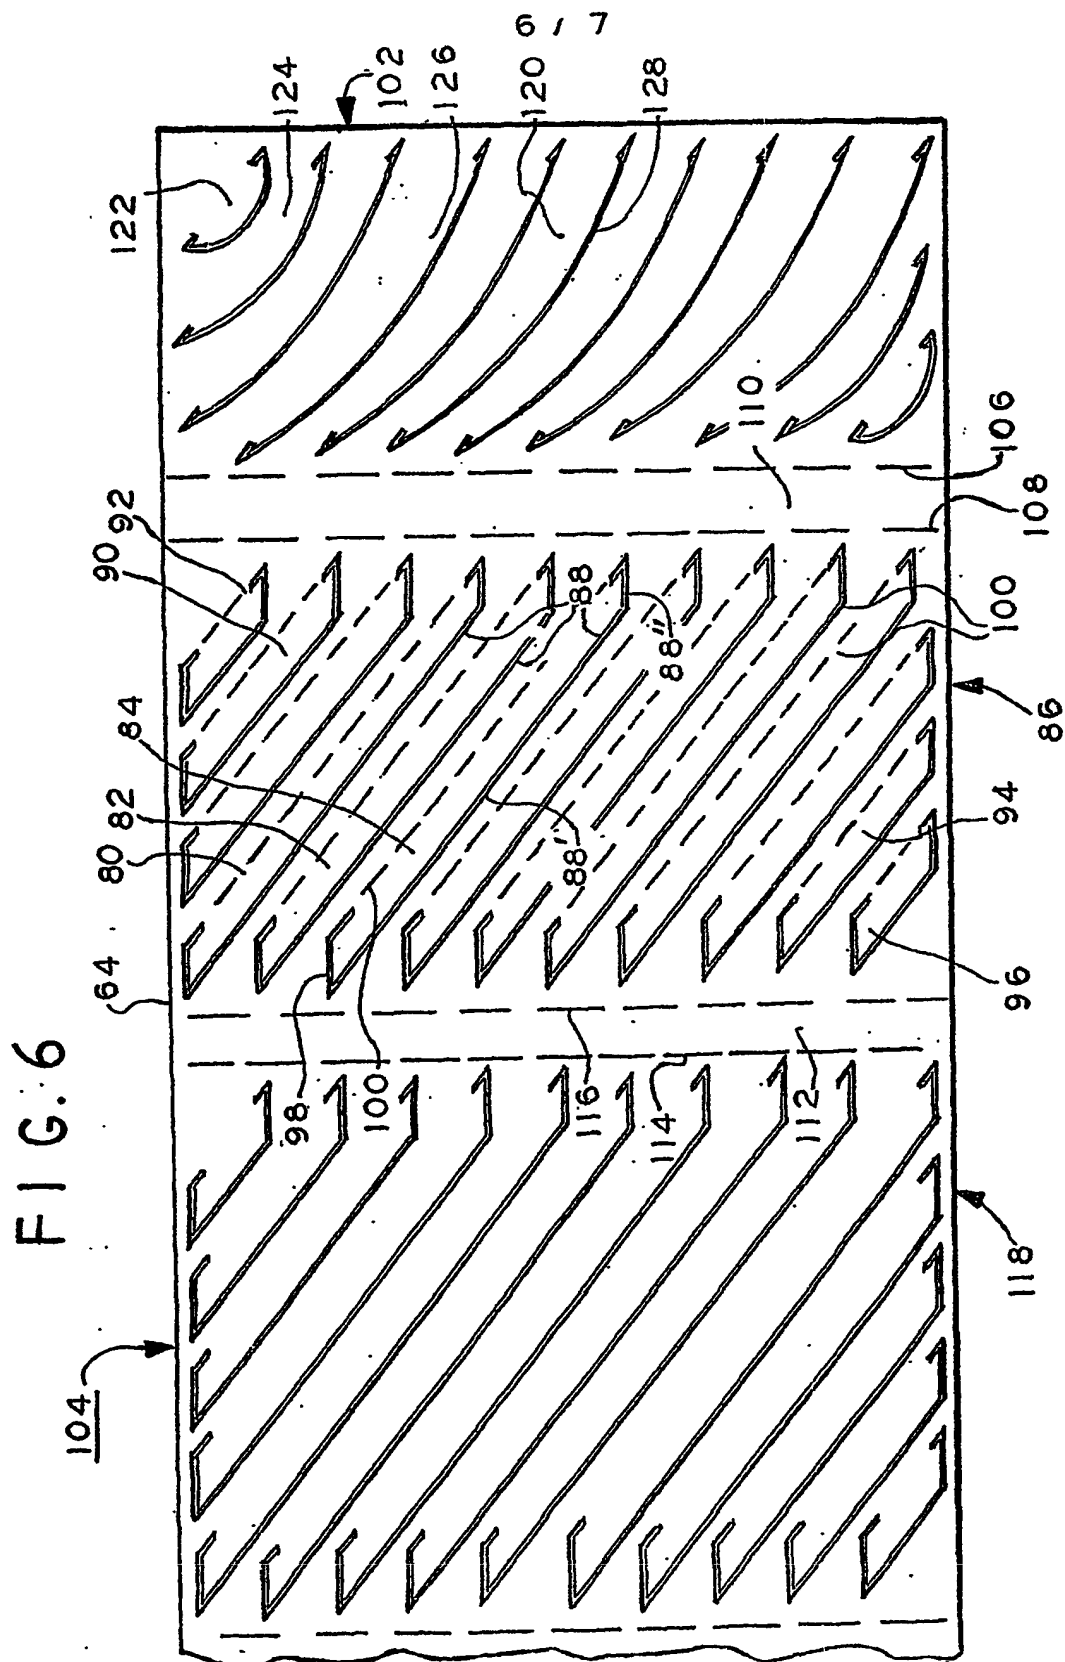

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
13 December 2001 (13.12.2001)


PCT

(10) International Publication Number
WO 01/094006 A3

- (51) International Patent Classification⁷: **B01J 19/24**, 19/32, 19/00
- (21) International Application Number: PCT/US01/17889
- (22) International Filing Date: 1 June 2001 (01.06.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/589,817 7 June 2000 (07.06.2000) US
- (71) Applicant: **ABB LUMMUS GLOBAL, INC.** [US/US];
1515 Broad Street, Bloomfield, NJ 07003 (US).
- (72) Inventors: **GRIFFIN, Timothy, Albert**; Bachtalstrasse
15, CH-5408 Ennetbaden (CH). **WINKLER, Dieter**; Am
Eichwald 9, D-79787 Lauchringen (DE). **PAIKERT, Bet-
tina**; Badererstrasse 8, CH-5452 Oberrohrdorf (CH).
- (74) Agents: **SQUIRE, William et al.**; Carella, Byrne, Bain,
Gilfillan, Cecchi, Stewart & Olstein, 6 Becker Farm Road,
Roseland, NJ 07068 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK,
SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,
CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- (88) Date of publication of the international search report:
30 October 2003

[Continued on next page]

(54) Title: **HEAT EXCHANGER/REACTOR APPARATUS**

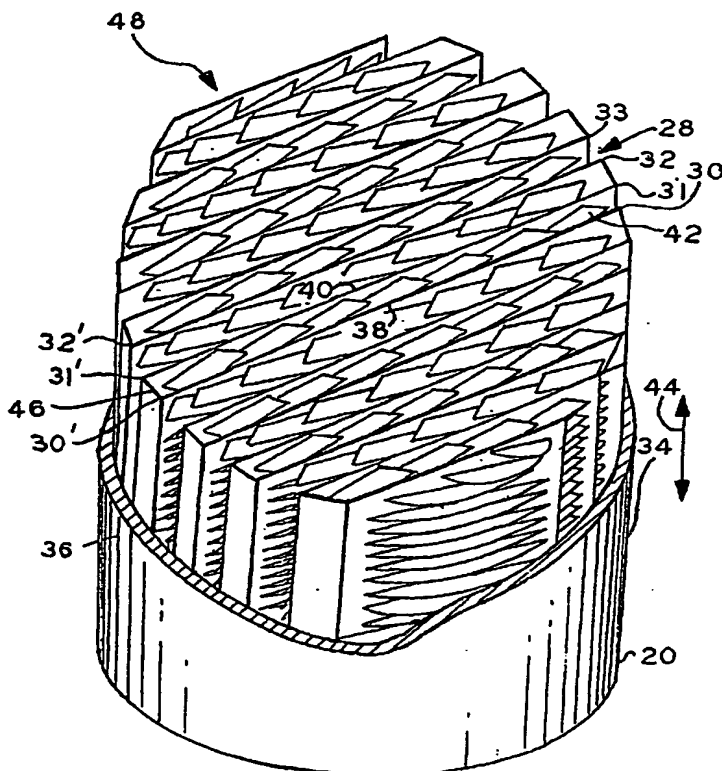

(57) Abstract: A plurality of reaction tubes 20 are in a reaction vessel cavity 6 in which a cooling fluid passes through. A plurality of modular packings 28 are provided in each tube 20, the packings 20 comprising porous mesh sheet material made of sintered metal fibers having a diameter of about 1-30 microns coated with a catalyst, the material having a void volume of preferably about 80-95%. Each module 28 is formed of a single sheet of material that is folded over at fold lines to form an intermediate interface that thermally conductively engages the tube and a pair of spaced parallel sections, the sections and interfaces forming a zig-zag structure to simplify manufacturing and insertion into the tubes 20. The sections are planar sheets with turbulence generators in the form of vanes (52, 54, 56, 57, 59, 80, 82, 84, 90, 92, 94, 96, 120, 122, 124, 126) formed from the sheet material and extending into the channels 42, 58 of adjacent sections. End vanes have arcuate edges for directly engaging the tube as do the end edges of the sections and the interfaces to provide enhanced thermal conductive engagement with the tube. The mesh material has a catalyst in the voids thereof. The vanes direct the fluid in the tubes 20 against the sides of the tube bore and also create turbulence for promoting fluid flow through the mesh material.

WO 01/094006 A3



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 01/17889

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B01J19/24 B01J19/32 B01J19/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>US 5 550 298 A (RONALD SHELDEN & JEAN-PAUL STINGARO) 27 August 1996 (1996-08-27)</p> <p>column 1, line 57 -column 2, line 39 column 2, line 52 - line 63 column 3, line 57 -column 4, line 67 figures 1,1A,3</p> <p style="text-align: center;">--- -/--</p>	<p>1-3, 6-11, 13-19, 22-24</p>

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *G* document member of the same patent family

Date of the actual completion of the international search

10 January 2002

Date of mailing of the international search report

23/01/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Stevnsborg, N

INTERNATIONAL SEARCH REPORT

International Application No
 /US 01/17889

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>US 4 568 583 A (MARTYN V. TWIGG) 4 February 1986 (1986-02-04)</p> <p>abstract column 1, line 1 - line 2 column 1, line 19 - line 66 column 2, line 24 - line 43 column 3, line 10 - line 44 column 5, line 17 - line 49 figure 3A</p>	<p>1,3, 6-10,14, 22-24</p>
X	<p>US 4 340 501 A (PETER J. DAVIDSON) 20 July 1982 (1982-07-20)</p> <p>column 2, line 35 -column 68 column 3, line 45 -column 4, line 68 column 7, line 3 - line 53 figures</p>	<p>1-3,6,7, 9-11, 13-15, 22-24</p>
X	<p>GB 2 229 173 A (KEMIRA OY) 19 September 1990 (1990-09-19) abstract page 6, line 30 -page 7, line 2 page 7, line 28 - line 31 page 8, line 2 - line 15 page 8, line 28 -page 9, line 2 page 9, line 14 - line 23 figure</p>	<p>1,6,7, 10,22-24</p>
X	<p>FR 2 152 765 A (VEB CHEMIEBAU- UND MONTAGEKOMBINAT LEIPZIG) 27 April 1973 (1973-04-27) page 3, line 25 -page 4, line 36 figures</p>	<p>1</p>
A	<p>DE 198 08 385 A (BASF AG) 2 September 1999 (1999-09-02)</p>	
A	<p>EP 0 950 433 A (ANDRZEJ GORAK & LARS KREUL) 20 October 1999 (1999-10-20)</p>	
A	<p>WO 99 34911 A (ABB LUMMUS GLOBAL INC) 15 July 1999 (1999-07-15) cited in the application</p>	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/17889

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5550298	A	27-08-1996	US 5473082 A AT 81477 T WO 9002603 A1 DE 58902465 D1 EP 0396650 A1 JP 2984290 B2 JP 3500983 T US 5417938 A	05-12-1995 15-10-1992 22-03-1990 19-11-1992 14-11-1990 29-11-1999 07-03-1991 23-05-1995
US 4568583	A	04-02-1986	AU 569873 B2 DE 3480192 D1 EP 0124226 A2 IN 161290 A1 JP 4331703 A NO 841166 A ,B, NZ 207547 A	25-02-1988 23-11-1989 07-11-1984 07-11-1987 19-11-1992 26-09-1984 06-03-1987
US 4340501	A	20-07-1982	CA 1152295 A1 DE 3068525 D1 DK 378780 A EP 0025308 A1 GB 2057908 A IN 155027 A1 JP 56045764 A NO 802632 A ,B, SU 1102494 A3	23-08-1983 16-08-1984 07-03-1981 18-03-1981 08-04-1981 22-12-1984 25-04-1981 09-03-1981 07-07-1984
GB 2229173	A	19-09-1990	FI 890428 A AU 620963 B2 AU 4866090 A BR 9000347 A CA 2008651 A1 DE 4002335 A1 ES 2019046 A6 FR 2642412 A1 IT 1240869 B JP 2275703 A NZ 232216 A SE 504578 C2 SE 9000227 A	28-07-1990 27-02-1992 02-08-1990 04-12-1990 27-07-1990 06-09-1990 16-05-1991 03-08-1990 17-12-1993 09-11-1990 25-10-1991 10-03-1997 28-07-1990
FR 2152765	A	27-04-1973	DD 98691 A1 BG 18878 A3 DE 2243024 A1 FR 2152765 A1	12-07-1973 20-03-1975 22-03-1973 27-04-1973
DE 19808385	A	02-09-1999	DE 19808385 A1 CN 1298369 T WO 9943611 A1 EP 1056682 A1	02-09-1999 06-06-2001 02-09-1999 06-12-2000
EP 950433	A	20-10-1999	DE 29807007 U1 EP 0950433 A1	30-07-1998 20-10-1999
WO 9934911	A	15-07-1999	US 6277340 B1 AU 2096999 A BR 9814581 A CN 1284895 T	21-08-2001 26-07-1999 10-10-2000 21-02-2001

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

US 01/17889

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9934911	A	EP 1042064 A1	11-10-2000
		WO 9934911 A1	15-07-1999
		US 2001038811 A1	08-11-2001